



VKS STEPS PTE LTD

*Step into Excellence*

# LAVISH VINYL FLOOR

Wood & Stone Collection



Total Thickness

**5.0** mm

Wear Layer

**0.3** mm



VKS STEPS PTE LTD

*Step into Excellence*

COLLECTION LUXURY VINYL FLOORING

# LVT CLICK

Wood & Stone Collection



No Glue



Easy Install

Lvt click is installed through its own click system, it's easy and fast to install.

The thickness is usually between 4-5mm.

Compared with other click flooring, LVT click has better foot-feeling and without any glue be used in the installation, it's popular among customers.

# EARTH COLLECTION

## AVAILABLE DECORS

Specification  
5.0X0.3mm


Wood collection size  
177.8X1219.2mm

Quantity  
2.1677 sqmt/box



**KS 501**  
MILKY MAPLE

---

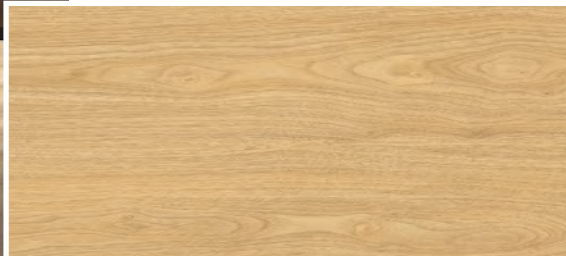


**KS 502**  
HAZELWOOD PINE

---



**KS 503**  
WALNUT TREEN

---

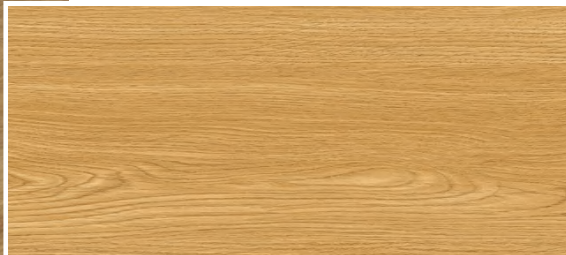

**KS 504**  
ALMOND OAK

---



**KS 505**  
HORSE CHESTNUT

---



VKS STEPS PTE LTD  
*Step into Excellence*



**KS 501**  
MILKY MAPLE




No Glue



Easy Install

177.8x1219.2mm

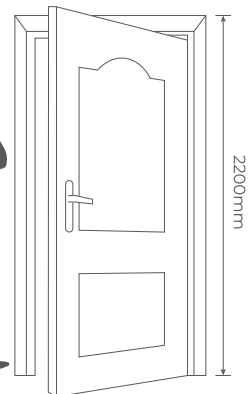

2200mm



VKS STEPS PTE LTD  
*Step into Excellence*



**KS 502**  
HAZELWOOD PINE




No Glue



Easy Install

177.8x1219.2mm

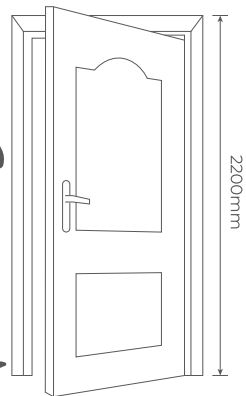

2200mm



VKS STEPS PTE LTD  
*Step into Excellence*



KS 503  
WALNUT TREE




No Glue



Easy Install

177.8x1219.2mm

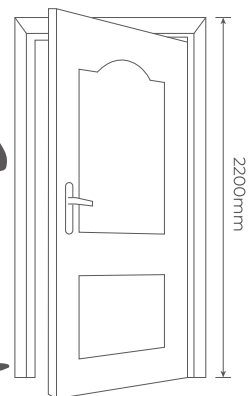

2200mm



VKS STEPS PTE LTD  
*Step into Excellence*



**KS 504**  
ALMOND OAK




No Glue



Easy Install

177.8x1219.2mm

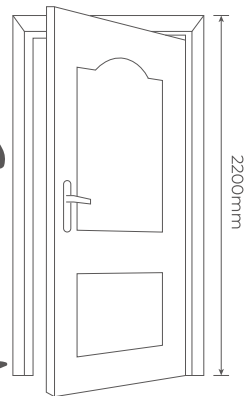

2200mm



VKS STEPS PTE LTD  
*Step into Excellence*



**KS 505**  
HORSE CHESTNUT




No Glue



Easy Install

177.8x1219.2mm

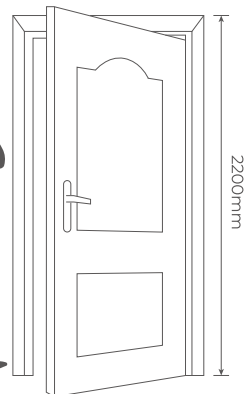

2200mm

# SKY COLLECTION

## AVAILABLE DECORS

Specification  
5.0X0.3mm

Wood collection size  
177.8X1219.2mm

Quantity  
2.1677 sqmt/box



**KS 506**  
STRATUS CLOUD

---



**KS 507**  
SILVERY OAK

---




**KS 508**  
CHARCOAL WOOL

---



VKS STEPS PTE LTD  
*Step into Excellence*

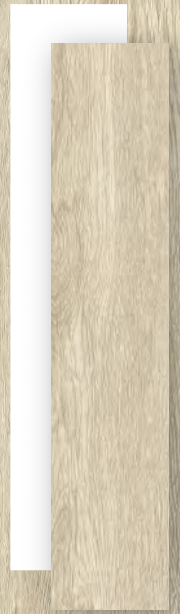

KS 506  
STRATUS CLOUD




No Glue



Easy Install

177.8x1219.2mm

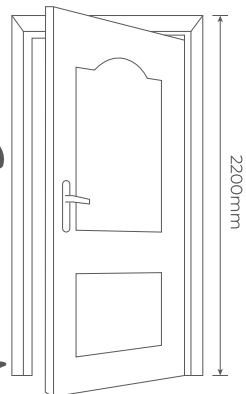

2200mm



VKS STEPS PTE LTD  
*Step into Excellence*



KS 507  
SILVERY OAK




No Glue



Easy Install

177.8x1219.2mm

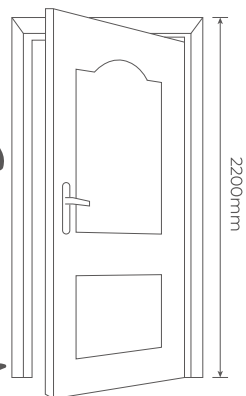

2200mm



VKS STEPS PTE LTD  
*Step into Excellence*



**KS 508**  
CHARCOAL WOOL




No Glue



Easy Install

177.8x1219.2mm

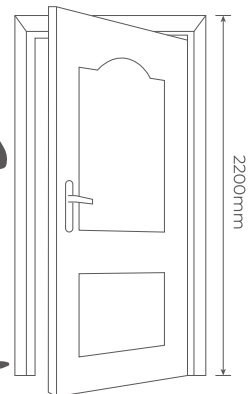

2200mm

# STONE COLLECTION

## AVAILABLE DECORS

Specification  
5.0X0.3mm

Wood collection size  
295.3X600.6mm

Quantity  
2.1283 sqmt/box



**KS 509**  
CELESTIAL CEMENT



**KS 510**  
MOONLIGHT MARBLE



VKS STEPS PTE LTD  
*Step into Excellence*



**KS 509**  
CELESTIAL CEMENT




No Glue



Easy Install

295.3X600.6mm

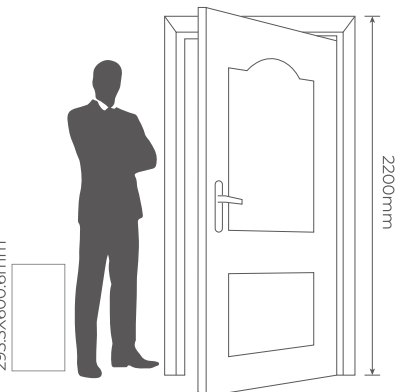



VKS STEPS PTE LTD  
*Step into Excellence*



**KS 510**  
MOONLIGHT MARBLE




No Glue



Easy Install

295.3X600.6mm

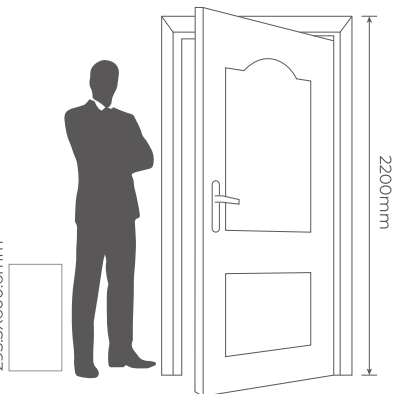

# TECHNICAL DATA

Product Specification				
Item	-----	Unit	Requirement	Result
Total Thickness	-----	mm	-----	5.0mm
Wear Layer	-----	mm	-----	0.3mm
Surface treatment	-----	mm	-----	PUR
Wood design size (WidthxLength)	-----	-----	-----	177.8X1219.2mm
Stone design size (WidthxLength)	-----	-----	-----	295.3X600.6mm
Technical Characteristics		EN standard Temperature:23°C+2°C EN standard Humidity:50%+5%		
Item	Standard	Unit	Result	
Length/Width	EN ISO 24342	mm	≤0.13% ≤0.50mm	
Squareness/Straightness	EN ISO 24342	mm	≤0.25mm	
Total thickness	EN ISO 24346	mm	±0.15mm	
Wear layer	EN ISO 24340	mm	±0.02mm	
Middle/back layer	EN ISO 24340	mm	+0.01mm	
Total mass per unit area	EN 430	-----	Nominal value +13%/-10%	
Peeling Strength of layer	EN 431	-----	>50N/50mm	
Residual indentation(average)	EN 433	mm	<0.1	
Sound,impact,reduction	EN ISO 717-2	dB	>4.8	
Fire Resistance	EN 13501-1	-----	Bfl-S1	
Slip resistance	DIN51130	-----	R9	
Dimension stability after exposure to heat	EN 434	%	<0.25	
Curling after exposure to heat	EN 434	mm	<1.2mm	
Color fastness to light	EN ISO 105 B02	-----	grade>6	
Loss on heating	JIS A5705	-----	<0.5%	
Change in length to water absorption	JIS A5705	mm	<0.20mm	
Flexibility	EN 435	-----	pass	



Eco-Friendly



Pet-Free



Fireproof



Easy Clean



Anti-Scratch



100% Waterproof



Click System



Soundproof



Extreme Stability

